Incredible Immersion with Excellent Value

VL5F-A Series

The VL5F series provides all-encompassing screen immersion thanks to its subtle 3.5 mm bezel-to-bezel screen gap, while its outstanding IPS panel delivers a clear image from any angle. With its extremely attractive and highly functional design, it can be used to deliver advertising and information in a variety of business environments.



Achieving Incredible Immersion



Virtually Seamless Screens with Narrow Bezel

The narrow bezel creates a visually stunning digital wall to effectively deliver dynamic content and immerse the viewers. The large screen it generates is enough to captivate the attention of passersby.



/

Image Gap Reduction

The VL5F-A series includes an image improvement algorithm that can reduce image gaps among tiled displays when playing back videos. Objects located on the bezel boundaries are adjusted for a seamless viewing experience.



* The "Conventional" refers to displays which do not include an image improvement algorithm.

Vivid and Dynamic Picture Quality




High Viewing Angle

Large screens are usually positioned higher than human-eye level, making uniform picture quality essential for video walls. The viewing angle of the VL5F series is high enough to display vivid colors throughout the screen with no distortion.



Wide Viewing Angle

It is well known that LG IPS panel technology enables the screen to be viewed from virtually any angle. Because of this, the VL5F-A series captures the attention of and captivates more viewers with lifelike colors, regardless of their viewing position.

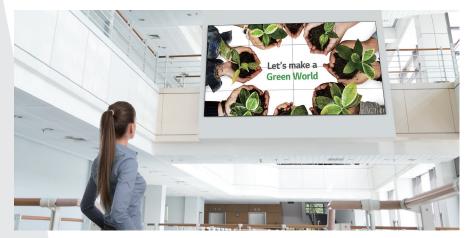

45° High Viewing Angle*



* Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment.

User Convenience



Easy Color Adjustment

Depending on the content, the color temperature of the display can be easily adjusted in increments of 100K using a remote control.





Simple White Balance Adjustment

In conventional video walls, white balance was adjustable only in "full-white" mode, but the VL5F-A series allows you to modify each value of grey scale to achieve more detailed and precise white balance adjustment.



User Convenience



User-Friendly Menu Structure


The VL5F-A menu structure has been optimized for commercial use by simplifying the user interface and grouping similar functions together. This more intuitive user interface reduces the amount of trial-and-error when browsing the menu structure and managing displays.



/

Intuitive User Interface


The user interface is carefully designed with a four-way navigation remote control that lets users easily switch to other settings. Also, it has a larger font for better visibility, which is necessary when users want to control displays from relatively far distances.

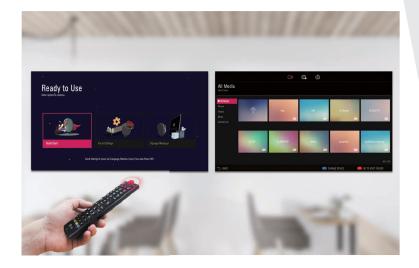


DIMENSIONS



-b



CONNECTIVITY

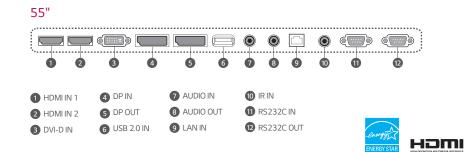

* Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG sales team to verify before orderin	۱g.

SPECIFICATIONS

		55VL5F-A
	Screen Size	55"
	Panel Technology	IPS
Panel	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness (Typ.)	500 nits
	Contrast Ratio	1,200:1
	Dynamic CR ¹⁾	500,000:1
	Viewing Angle (H x V)	178 X 178
	Response Time	8 ms (G to G)
	Surface Treatment	3%
	Life Time (Typ.)	50,000 Hrs 24 Hrs
	Operation Hours	
	Orientation	Landscape & Portrait
	Input	HDMI(2), DP, DVI-D, Audio, USB 2.0
Connectivity	Output	DP, Audio
	External Control	RS232C In/out, RJ45(LAN) In, IR In
	Bezel Color	Black
	Bezel Width	2.25 mm (T/L) / 1.25 mm(B/R)
	Monitor Dimension (W x H x D)	47.8" x 26.9" x 3.7" / 1,213.4 x 684.2 x 93.1 mm
Mechanical	Weight (Head)	23 lbs / 23kg
Specification	Carton Dimensions (W \times H \times D)	52.6" x 32.6" x 9.4" / 1,337 x 828 x 239 mm
	B 1 1141111	CC 0 (00 0)
	Packed Weight	66.8 lbs / 30.3kg
Key Feature	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul	Yes 600 x 400 mm 1 5x1 5), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²⁾ , No Signal Image (Up t
	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul 5MB), W	Yes 600 x 400 mm 1 5x1 5), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up 1 ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode)
Environmental	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul 5MB), W Operation Temperature	Yes 600 x 400 mm 1 5x1 5), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up take on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C
	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up- ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80%
Environmental	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul 5MB), W Operation Temperature	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up- ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V~, 50/60Hz
Environmental Conditions	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up- ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80%
Environmental	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up- ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V~, 50/60Hz
Environmental Conditions	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Temperature	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up- ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V-, 50/60Hz Built-In Power
Environmental Conditions	Handle VESA ^{IM} Standard Mount Interface Temperature Sensor, Tile Mode (Up tc USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Typ. / Max.	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²¹ , No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V-, 50/60Hz Built-In Power 130 W / 150 W
Environmental Conditions	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Consumption Typ. / Max. Smart Enegy Saving	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ng (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²³ , No Signal Image (Up t ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V-, 50/60Hz Built-In Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 /
Environmental Conditions Power	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Consumption Smart Enegy Saving Safety	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ng (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²³ , No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32"F to 104"F / 0"C to 40"C 10% to 80% 100-240V-, 50/60Hz Built-In Power 130 W/ 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1
Environmental Conditions Power	Handle VESA ^{IM} Standard Mount Interface Temperature Sensor, Tile Mode (Up tc USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Consumption Safety EMC	Yes 600 x 400 mm 15x15), Natural Mode (@Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wing (USB), Calibration Mode, PM Mode, Firarware Update (LAN), HDMI-CEC ²), No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 100*240V+, 50/60Hz Built-In Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1 / UL 60950-1 FCC Class 'A" / CE / KC
Environmental Conditions Power Certification Media player	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Consumption Safety EMC ErP / Energy Star	Yes 600 x 400 mm 115x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play w ng (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V-, 50/60Hz Built-In Power 130 W / 150 W 62 W IEC 60950-1 / UL 60950-1 UL 60950-1 Yes (EU Only) / Yes (Energy Star 8.0)
Environmental Conditions Power Certification Media player	Handle VESA ^M Standard Mount Interface Temperature Sensor, Tile Mode (Up tc USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Type Power Type Power Type Power Type Power Consumption Safety EMC ErP / Energy Star OPS Type Compatible External Media Player Attachable	Yes 600 x 400 mm 1 5x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wing (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²¹ , No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V-, 50/60Hz Built-In Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1 / UL 60950-1 / UL 60950-1 / SCC Class "A" / CE / KC Yes (EU Only) / Yes (Energy Star 8.0) No Yes (MP500/MP700)
Environmental Conditions Power Certification Media player Compatibility	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up to USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Type Power Consumption Safety EMC ErP / Energy Star OPS Type Compatible	Yes 600 x 400 mm 15x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wi ng (USB), Calibration Mode, PM Mode, Firamware Update (LAN), HDMI-CEC ²), No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 10% to 80% 100-240V-, 50/60Hz Built-In Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1 FCC Class "A" / CE / KC Yes (EU Only) / Yes (Energy Star 8.0) No
Power Certification Media player Compatibility Software	Handle VESA TM Standard Mount Interface Temperature Sensor, Tile Mode (Up tc USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Supply Power Type Power Consumption Typ. / Max. Smart Enegy Saving Safety EMC ErP / Energy Star OPS Type Compatible External Media Player Attachable Content Management Software	Yes 600 x 400 mm 1 5x15), Natural Mode @Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wing (USB), Calibration Mode, PM Mode, Firarware Update (LAN), HDMI-CEC ²⁷ , No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 100-240V-, S0/60Hz Built-In Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1 / UL 60950-1 FCC Class 'A' / CE / KC Yes (EU Only) / Yes (Energy Star 8.0) No Yes (MP500/MP700) SuperSign CMS
Environmental Conditions Power Certification Media player Compatibility Software Compatibility	Handle VESA ^M Standard Mount Interface Temperature Sensor, Tile Mode (Up tc USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Consumption Safety EMC ErP / Energy Star OPS Type Compatible External Media Player Attachable Content Management Software Control and Monitoring Software	Yes 600 x 400 mm 1 5x15), Natural Mode (@Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wing (USB), Calibration Mode, PM Mode, Firanware Update (LAN), HDMI-CEC ³ , No Signal Image (Up take on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 100-240V-, 50/60Hz Built-in Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1 / UL 60950-1 / UL 60950-1 / Sec (MoS) Yes (EU Only) / Yes (Energy Star 8.0) No Yes (MP500/MP700) SuperSign Control / Control+
Environmental Conditions Power Certification Media player Compatibility Software	Handle VESA ^M Standard Mount Interface Temperature Sensor, Tile Mode (Up tc USB, USB Cloning, Contents Schedul SMB), W Operation Temperature Operation Humidity Power Supply Power Type Power Consumption Typ. / Max. Smart Enegy Saving Safety EMC ErP / Energy Star OPS Type Compatible External Media Player Attachable Content Management Software Control and Monitoring Software Warranty	Yes 600 x 400 mm 1 5x15), Natural Mode (@Tile Mode, ISM Method, DPM Wake Up, Smart Energy Saving, File Play wing (USB), Calibration Mode, PM Mode, Firanware Update (LAN), HDMI-CEC ²), No Signal Image (Up ake on LAN, Failover, OPS Power Control, Scan Inversion (with Pivot Mode) 32°F to 104°F / 0°C to 40°C 100-240V-, 50/60Hz Built-in Power 130 W / 150 W 62 W IEC 60950-1 / EN 60950-1 / UL 60950-1 / UL 60950-1 FCC Class 'A" / CE / KC Yes (EU Only) / Yes (Energy Star 8.0) No Yes (MP500/MP700) SuperSign Control / Control+ 3 Year Parts and Labor

¹⁾The luminosity ratio of Full Black/Full White color on video input condition.

²⁾ Compatibility may differ by equipment.

* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.

© Copyright 2022 ©LG Electronics USA, Inc. All rights reserved. LG and the LG logo are registered trademarks of LG Corp. All other trademarks are the property of their respective owners. Prices, promotions, and availability may vary by dealer. The information contained herein is subject to change without notice. All screen images are simulated. SPEC_VL5F_022221_LR



(L https://www.lg.com/us/business/commercial-display Õ https://www.twitter.com/LGCommDisplays

- https://www.facebook.com/LGcommercialdisplays Ō
- Ō https://www.linkedin.com/company/lg-commercial-displays-usa
- https://www.youtube.com/lgcommercialdisplayusa Ō